



08/04/00

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No.	8737.20016
	First Inventor or Application Identifier	Hong Joo KIM
	Title	Mobile Communication Station and Display Therein

JC892 U.S. PTO

09/633061

08/04/00

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)	ACCOMPANYING APPLICATION PARTS
2. <input checked="" type="checkbox"/> Specification Total Pages 22	6. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) Total Sheets 6	7. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee)
4. <input checked="" type="checkbox"/> Oath or Declaration Total Pages 2	8. <input type="checkbox"/> English Translation Document (if applicable)
a. <input checked="" type="checkbox"/> Newly executed (original or copy)	9. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations
b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) (for continuation/divisional with box 15 completed)	10. <input type="checkbox"/> Preliminary Amendment
i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §1.63(d)(2) and 1.33(b).	11. <input checked="" type="checkbox"/> White Advance Serial No. Postcard
5. <input type="checkbox"/> Incorporation By Reference (usable if box 4B is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4B, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	12. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application. Status still proper and desired.
15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below. <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application no.: Prior application information: Examiner: Group Art Unit:	13. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. Amend the specification by inserting before the first line the sentence: <input type="checkbox"/> This application is a <input type="checkbox"/> Continuation <input type="checkbox"/> Division <input type="checkbox"/> Continuation-in-part (CIP) of application Serial No. Filed on	14. <input checked="" type="checkbox"/> Other: Check in the amount of \$916.00 Request for Priority
17. CORRESPONDENCE ADDRESS LONG ALDRIDGE & NORMAN LLP 701 Pennsylvania Avenue, N.W. Washington, D.C. 20004 (202) 624-1200 FACSIMILE: (202) 624-1298	

Name:	Kenneth D. Springer	Registration No.:	39,843
Signature:		Date:	August 4, 2000
Name:		Registration No.:	

UNITED STATES PATENT APPLICATION

OF

HONG JOO KIM

FOR

MOBILE COMMUNICATION STATION AND

DISPLAY THEREIN

This application claims the benefit of Korean Patent Application No. 1999-32001, filed on August 4, 1999, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a mobile communication station (mobile station), and more particularly, to a mobile station and a display therein, in which a plurality of LCDs (Liquid Crystal Displays) are made operative from one operation means for recognizing information on an originating station and information on a state of a receiver station even if a folder cover is not opened in a folder type mobile station.

Background of the Related Art

A related art LCD will be explained. FIG. 1 illustrates a section of a related art LCD, and FIG. 2 illustrates a block diagram of a two-faced display of LCD in a related art mobile station.

Referring to FIG. 1, the related art LCD is provided with a lower substrate 13 having a scan electrode pattern, a signal electrode pattern, and a pixel electrode pattern formed thereon, and an upper substrate 12 having a common electrode pattern, a black matrix and color filter layer, and liquid crystal 14 injected between the upper substrate 12 and the lower substrate 13. There are polarizing plates 11 and 15 on an upper surface of the upper substrate 12 and on a lower surface of the lower substrate 13, respectively, for compensating for a phase difference caused by light refraction in the course of display of characters, numerals, or

figure. And, there is a reflection plate 16 on a bottom surface of the polarizing plate 15 for reflecting light in a forward direction. The upper and lower substrates 12 and 13 are formed of glass or film having very good transparency, and the electrode pattern on the upper substrate 12 and the lower substrate 13 may be of the matrix type, segment type, or a mixture of the dot matrix type and the segment type.

A device for displaying characters, numerals, or figures on two faces of the device by applying two of the foregoing LCDs to the device will be explained.

Referring to FIG. 2, the device for displaying characters, numerals, or figures on two faces of the device is provided with a first and a second liquid crystal displays 26a and 26b respectively having signal electrodes and scan electrodes, a controller 21 for receiving and analysing a video signal, to provide a control signal for displaying characters, numerals, and figures, a first memory 22, a volatile memory for temporary storage of a signal or storage of booted data for accelerating operation of the controller 21, a second memory 23, a non-volatile memory for storing a general management algorithm of the controller 21 therein, a first operator 24a for operating the signal electrodes and the scan electrodes in the first LCD 26a in response to a control signal from the controller 21 for displaying the video signal, a second operator 24b for operating the signal electrodes and the scan electrodes in the second LCD 26b in response to a control signal from the controller 21, and first and second frame memories 25a and 25b for storing signals to be used in implementing the characters, numerals, and figures provided from the controller 21 for the first and second operators 24a and 24b. That is, there are two LCDs each having separate signal electrodes and scan electrodes and two operators for operating respective LCDs.

Operation of the two faced display provided by attaching two of the foregoing LCDs on a front and back of a plane will be explained.

Upon reception of system power, the controller 21 accesses to an operation program in the second memory 23, to be in a state that an initially booted condition of the system is maintained, and detects an external signal input for displaying characters, numerals, or figures. Upon detection of reception of an external signal, the controller analyses the input signal according to the managing algorithm and analysing algorithm stored in the first and second memories 22 and 23, and provides a control signal for displaying characters, numerals, and figures to the first and second operators 24a and 24b. Each of the first and second operators 24a and 24b provides an operating signal for displaying the characters, numerals, and figures to the scan electrodes and the signal electrodes in the first and second LCDs 26a and 26b attached on the inside and outside of a system for two faced display in response to the control signal for display from the controller 21. The first and second frame memories 25a and 25b process and store the control signals for displaying characters, numerals or figures provided for controlling display from the controller 21 in frame units, and present the signals in frame units stored in relevant memory regions in response to an access signal from the first and second operators 24a and 24b, thereby maintaining a stable display of the characters, numerals, or figures on the first and second LCDs 26a and 26b.

However, the related art two faced display has the following problems.

First, in order to display characters, numerals, and figures in two faces, two separate LCDs are required, and two corresponding operators are required for operating the two LCDs, and duplicate control algorithms are required for the two-faced display, that increases power consumption and costs.

Second, the two operators required for operating the two LCDs respectively occupy much space inside of the system, that impedes fabrication of a light weight and slim product. For example, the two LCDs required to attach to an inside and outside of the folder cover for recognition of information on an originating station, recognition of received characters, and reading time information, without opening the folder cover in a folder type mobile station, is not in line with a goal of providing a small sized and light folder type mobile station device, and increases cost due to the addition of an expensive LCD and operator.

SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a mobile station and a display therein that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

An object is to provide a mobile station and a display therein, which has a low power consumption, permits effective use of limited space and to save a production cost, permits to recognize information on an originating station, a received message, time information, and other message displayed without opening the folder cover, and to permit to provide a light weight, and slim mobile station.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

To achieve these and other advantages and in accordance with the purposes of the present invention, as embodied and broadly described, the mobile station includes a folder cover movable between an opened position and a closed position, first display means mounted on one side of the folder cover having 'n' first signal electrodes and 'k' scan electrodes, second display means mounted on the other side of the folder cover having 'n' second signal electrodes and 'm-k' scan electrodes, and an operator for operating the first and second display means having 'm' scan electrode lines connecting the 'k' scan electrodes in the first display means and the 'm-k' scan electrodes in the second display means, and 'n' signal electrode lines connecting the first signal electrodes and the second signal electrodes, respectively.

In other aspect, there is provided a mobile station including a folder cover movable between an opened position and a closed position, first display means mounted on one side of the folder cover having 'n' first scan electrodes and 'k' signal electrodes, second display means mounted on the other side of the folder cover having 'n' second scan electrodes and 'm-k' signal electrodes, and an operator for operating the first and second display means having 'm' signal electrode lines connecting the 'k' signal electrodes in the first display means and the 'm-k' signal electrodes in the second display means, and 'n' scan electrode lines connecting the first scan electrodes and the second scan electrodes, respectively.

In another aspect, there is provided a display in a mobile station including first liquid crystal display having a plurality of first signal electrodes defining a plurality of first pixels and a plurality of first scan electrodes, second liquid crystal display having a plurality of second signal electrodes defining a plurality of second pixels and a plurality of second scan electrodes, and an operator for operating the first and second liquid crystal displays having a

plurality of scan electrode lines connecting the first and second scan electrodes, and a plurality of signal electrode lines connecting the first signal electrodes and the second signal electrodes, respectively.

In further aspect, there is provided a display in a mobile station including first liquid crystal display having a plurality of first signal electrodes defining a plurality of first pixels and a plurality of first scan electrodes, second liquid crystal display having a plurality of second signal electrodes defining a plurality of second pixels and a plurality of second scan electrodes, and an operator for operating the first and second liquid crystal displays having a plurality of signal electrode lines connecting the first and second signal electrodes, and a plurality of scan electrode lines connecting the first scan electrodes and the second scan electrodes, respectively.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, together with the description serve to explain the principles of the invention:

In the drawings:

FIG. 1 illustrates a section of a related art LCD;

FIG. 2 illustrates a block diagram of two faced display of LCD in a related art mobile station;

FIG. 3 illustrates a system of two LCDs connected to one operating means in accordance with a preferred embodiment;

FIG. 4 illustrates a display in a mobile station in accordance with a first preferred embodiment;

5 FIG. 5 illustrates a display in a mobile station in accordance with a second preferred embodiment;

FIG. 6 illustrates operation of a display in a mobile station in accordance with a preferred embodiment;

FIG. 7 illustrates a perspective view of a display in a mobile station with a folder opened in accordance with a preferred embodiment;

FIG. 8 illustrates a perspective view of a display in a mobile station with a folder closed in accordance with a preferred embodiment; and,

FIG. 9 illustrates a flow chart showing the steps of a method for operating a display in a mobile station in accordance with a preferred embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Reference will now be made in detail to the preferred embodiments, examples of which are illustrated in the accompanying drawings. FIG. 3 illustrates a system of two LCDs connected to one operating means in accordance to a preferred embodiment.

20 Referring to FIG. 3, the display in a mobile station in accordance with a preferred embodiment of the present invention includes an operator 100, a first LCD 200, and a second LCD 300 with common signal electrode lines, so that the one operator 100 operates the first and second LCDs. That is, the operator 100 controls operation of 'n' signal electrode lines

SEG₁ - SEG_n, and 'm' scan electrode lines COM₁ - COM_m, for displaying characters, numerals, and figures on the first or second LCDs 200 or 300 in response to a control signal provided from a system controller. The first LCD 200 includes 'n' signal electrodes connected to 'n' signal electrode lines SEG₁ - SEG_n in the operator 100 respectively, and 'k' scan electrodes connected to from a first to 'k'th scan electrode lines COM₁ - COM_k among the 'm' scan electrode lines COM₁ - COM_m, respectively. Accordingly, the first LCD 200 has n x k pixels. The second LCD 300 includes 'n' signal electrodes connected to 'n' signal electrode lines SEG₁ - SEG_n in the operator 100 respectively, and 'm - k' scan electrodes connected to from a (k + 1)th to 'm'th scan electrode lines COM_{k+1} - COM_m among the 'm' scan electrode lines COM₁ - COM_m, respectively. Accordingly, the second LCD 300 has n x (m-k) pixels. The 'n' signal electrode lines have 'n' first signal electrode lines connecting the operator 100 to the 'n' signal electrodes in the first LCD 200, and 'n' second signal electrode lines connecting the 'n' signal electrodes in the first LCD 200 to the 'n' signal electrodes in the second LCD 300.

Though not shown, the system may be provided such that the operator 100 operates the first and second LCDs 200 and 300 with the scan electrode lines provided in common. That is, the operator 100 controls operation of the 'n' scan electrode lines COM₁ - COM_m, and 'm' signal electrode lines SEG₁ - SEG_m, for displaying characters, numerals, or figures on the first or second LCD 200 or 300 in response to the control signal provided from the system controller. The first LCD 200 has 'n' scan electrodes connected to 'n' scan electrode lines COM₁ - COM_n in the operator 100 respectively, and 'k' signal electrodes connected to a first to a 'k'th signal electrode lines SEG₁ - SEG_k among the 'm' signal electrode lines SEG₁ - SEG_m, respectively. Therefore, the first LCD 200 has n x k pixels. The second LCD 300 has

'n' scan electrodes connected to 'n' scan electrode lines $COM_1 - COM_n$ in the operator 100 respectively, and 'm - k' signal electrodes connected to a 'k+1'th to a 'm'th signal electrode lines $SEG_{k+1} - SEG_m$ among the 'm' signal electrode lines $SEG_1 - SEG_n$, respectively.

Therefore, the second LCD 300 has $n \times (m-k)$ pixels. The 'n' scan electrode lines have 'n' first scan electrode lines connecting the operator 100 to the 'n' scan electrodes in the first LCD 200, and the 'n' second scan electrode lines connecting the 'n' scan electrodes in the first LCD 200 to the 'n' scan electrodes in the second LCD 300.

In the preferred embodiment of the foregoing system, the first LCD 200 has a screen greater than the second LCD 300, and, when the first LCD 200 is mounted on a mobile station on inside of a folder thereof, the first LCD 200 serves as a main screen, and the second LCD 300 is mounted on outside of the folder of the mobile station, to serve as a supplementary screen. Signal interfaces between the operator 100 and the first and second LCDs 200 and 300 (signal electrode lines and scan electrode lines) are preferably made by means of flexible wires.

An arrangement of the two faced display of the first and second LCDs 200 and 300 by one operator 100 is as follows. FIG. 4 illustrates a display in a mobile station in accordance with a first preferred embodiment.

There is a light plate 'A' disposed in the middle for stable dispersion of a light from a light source when a back light is illuminated, to provide a uniform back light, there is the aforementioned first LCD 200 on an upper surface of the light plate 'A', and there is the aforementioned second LCD 300 on a back surface of the light plate 'A'. Therefore, the light plate 'A' supplies the light source of back lighting both to the first LCD 200 and the second LCD 300, and the first LCD 200 and the second LCD 300 have opposite directions of display.

The light plate 'A' has a size equal to an area of the first LCD 200, and there is a light shielding film 'B' on a remainder of the back surface where the second LCD 300 is not disposed for preventing loss of light from the light source as well as cutting off an infiltration of an external light because a size of the second LCD 300 is smaller than a size of the first LCD 200. And, there is an operator 100 on the light shielding film 'B', and there is a signal line connected through a FPC (Flexible wire) between the operator 100 and the first LCD 200, and there is also a signal line through a FPC between the first LCD 200 and the second LCD 300.

FIG. 5 illustrates a display in a mobile station in accordance with a second preferred embodiment.

The display in a mobile station in accordance with a second preferred embodiment has an operator 100 built in a folder cover. That is, first and second LCDs 200 and 300, a light plate 'A', and a light shielding film 'B' are disposed the same as shown in FIG. 4, only the operator 100 is built in a folder cover body through a FPC (Flexible wire). When the display having the first and second LCDs is mounted on a folder of a mobile station, the first LCD 200, the main screen, is fixed to an inside surface of the folder, and a window is formed in a portion of the folder corresponding to a portion of the second LCD 300, so that the second LCD 300 displays to the outside of the folder, as shown in FIGS. 7 and 8.

FIG. 7 illustrates a perspective view of a display in a mobile station with a folder opened in accordance with a preferred embodiment of the present invention, and FIG. 8 illustrates a perspective view of a display in a mobile station with a folder closed in accordance with a preferred embodiment.

Referring to FIG. 7, a mobile station includes a body 400, a folder cover 410, and a hinge 430 for coupling the body 400 and the folder cover 410. And, the body 400 has a folder switch 420 for sensing opening and closing of the folder cover 410, and the folder cover 410 has the first LCD 200 on an inside thereof, and the second LCD 300 on an outside thereof.

Operation of a system including the first LCD 200 (a main screen), the second LCD 300 (a supplementary screen), and the operator 100 for operating the first and second LCDs 200 and 300, for displaying numerals, characters, or figures or graphics will be explained. FIG. 6 illustrates operation of a display in a mobile station in accordance with a preferred embodiment.

Referring to FIG. 6, a display in a mobile station for operating two LCDs by one operator includes a controller 70, a RAM 80, a ROM 90, an operator 100, and a frame memory 110. The controller 70 controls overall display operation of the first and second LCDs 200 and 300, and, particularly, as can be known from FIG. 7, the controller 70 activates the first LCD 200 mounted on an inside surface of the folder cover 410 according to a signal of the folder switch 420 switched as the folder cover 410 is opened/closed, or as can be seen from FIG. 8, activates the second LCD 300 mounted on an outside of the folder cover 410 which provides brief information, such as information on an originating station, name, information on the present time, and the like on reception of a signal. The RAM 80 stores a signal provided to a volatile memory temporarily, or a booted data, for accelerating operation of the controller, and the ROM 90 is a nonvolatile memory for storing a general management algorithm for the controller 70 therein. The operator 100 controls operation of a plurality of signal electrodes $SEG_1 - SEG_n$, and a plurality of scan electrodes $COM_1 - COM_m$ for selective

operation of the first and second LCDs 200 and 300 respectively mounted on inside/outside surfaces of the folder cover 400 in response to a control signal provided from the controller 70 for displaying characters, numerals, or graphics of figures. The frame memory 110 processes a signal provided for controlling display in frame units for maintaining a stable display of the characters, numerals, or figures.

A display method following opening and closing of the folder in a mobile station of the present invention having the aforementioned system will be explained. FIG. 9 illustrates a flow chart showing the steps of a method for operating a display in a mobile station in accordance with a preferred embodiment.

First, a case when the display of the mobile station has a system as shown in FIG. 3 will be explained. When power is supplied to a folder type mobile station, the controller 70 is initialized according to the algorithm and the management program stored in the RAM 80 and in the ROM 90, and upon completion of an initialization booting, the step proceeds to a standby mode for analyzing a signal from the folder switch 420 switched according to opening and closing of the folder cover 410 centered on the hinge 430. If the signal from the folder switch 420 is analyzed in the above step indicates that the folder cover 410 is closed, the controller 70 determines that the mobile station is in a mode for displaying the present time, and information on a status of the mobile station through the second LCD 300, a supplementary screen, provided on an outside of the folder cover 410, and provides a control signal pertinent to the mode to the operator 100. Then, the operator 100 displays the information on a state of the mobile station, and information on the present time on the second LCD 300 mounted on an outside of the folder cover 410 in response to the control signal. That is, a frame signal for implementing display stored in the frame memory 110 is

read, and only first to 'n'th signal electrodes $SEG_1 - SEG_n$ and 'k+1'th to 'm'th scan electrodes $COM_1 - COM_m$ are controlled, for displaying the information on the second LCD 300.

In a state that general information on the mobile station is displayed on the second LCD 300, a supplementary screen, formed on outside of the folder cover 410, if the signal from the folder switch 420 indicates that the folder cover 410 is opened, then the controller 70 provides a control signal to the operator 100 for executing change over of the display of the state information from the second LCD 300 to the first LCD 200. Accordingly, the operator cuts off the display on the second LCD 300, and displays the general information through the first LCD 200. That is, a frame information on implementation of display stored in the frame memory 110 is read, and only first to 'n'th signal electrodes $SEG_1 - SEG_n$ and first to 'k'th scan electrodes $COM_1 - COM_k$ are operated, for displaying the information on the first LCD 200. And, under a state in which the folder cover is closed only to display general status information through the second LCD 300, if a call is detected through a base station relay, the controller 70 analyses information on the originating station included in the call, and displays an originating call number on the second LCD 300. Accordingly, the subscriber can select connection to the call depending on the information on the displayed originating station, and a received message in characters or a call message can be recognized, conveniently.

As has been explained, the mobile station and the display therein disclosed herein have the following advantages.

First, the mobile station and the display therein is convenient to use because general operation status, such as recognition of information on an originating station for a call,

reception of a message in characters, and time information, can be displayed on an LCD mounted on an outside of a folder by providing LCDs on inside and outside of a folder and operating means for operating the LCDs.

Second, the control of two LCDs by one operator, and the provision of back lights by one light plate permits a reduction of power consumption, and to prolong a time period a mobile station can remain operative from a single charge.

Third, the control of two LCDs by one operator, and the provision of back lights by one light plate permit an effective use of a limited space in the system, thereby permitting fabrication of a light weight and slim mobile station.

Fourth, since general operation status, such as recognition of information on an originating station for the call, reception of a message in characters, and time information, is displayed on the LCD mounted on an outside of the folder, the number of openings and closings of the folder cover, unnecessary power consumption caused by opening and closing of the folder cover can be reduced, such as back light illumination, can be eliminated, that can prolong an lifetime of the battery.

It will be apparent to those skilled in the art that various modifications and variations can be made in the mobile station and the display therein of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is Claimed is:

1 1. A mobile station comprising:
2 a folder cover movable between an opened position and a closed position;
3 first display means mounted on one side of the folder cover having 'n' first signal
4 electrodes and 'k' scan electrodes;
5 second display means mounted on the other side of the folder cover having 'n' second
6 signal electrodes and 'm-k' scan electrodes; and,
7 an operator for operating the first and second display means having 'm' scan electrode
8 lines connecting the 'k' scan electrodes in the first display means and the 'm-k' scan
9 electrodes in the second display means, and 'n' signal electrode lines connected to the first
10 signal electrodes and the second signal electrodes, respectively.

1 2. A mobile station as claimed in claim 1, further comprising a controller for
2 providing a control signal to the operator for controlling display by the first and second
3 display means.

1 3. A mobile station as claimed in claim 2, wherein the controller enables display
2 by the first display means when the folder cover is in the open position.

1 4. A mobile station as claimed in claim 2, wherein the controller enables display
2 by the second display means when the folder cover is in the closed position.

1 5. A mobile station as claimed in claim 2, further comprising a folder switch, the
2 folder switch being in a first position when the folder cover is in the open position, and the
3 folder switch being in a second position when the folder cover is in the closed position.

1 6. A mobile station as claimed in claim 5, wherein the controller receives a
2 display selection signal from the folder switch, and in response thereto, enables display by
3 one of the first and second display means, and disables display by an other of the first and
4 second display means.

1 7. A mobile station, comprising:
2 a folder cover movable between an opened position and a closed position;
3 first display means mounted on one side of the folder cover having 'n' first scan
4 electrodes and 'k' signal electrodes;
5 second display means mounted on the other side of the folder cover having 'n' second
6 scan electrodes and 'm-k' signal electrodes; and,
7 an operator for operating the first and second display means having 'm' signal
8 electrode lines connecting the 'k' signal electrodes in the first display means and the 'm-k'
9 signal electrodes in the second display means, and 'n' scan electrode lines connected to the
10 first scan electrodes and the second scan electrodes respectively.

1 8. A mobile station as claimed in claim 7, further comprising a controller for
2 providing a control signal to the operator for controlling display by the first and second
3 display means.

1 9. A mobile station as claimed in claim 8, wherein the controller enables display
2 by the first display means when the folder cover is in the open position.

1 10. A mobile station as claimed in claim 8, wherein the controller enables display
2 by the second display means when the folder cover is in the closed position.

1 11. A mobile station as claimed in claim 8, further comprising a folder switch, the
2 folder switch being in a first position when the folder cover is in the open position, and the
3 folder switch being in a second position when the folder cover is in the closed position.

1 12. A mobile station as claimed in claim 11, wherein the controller receives a
2 display selection signal from the folder switch, and in response thereto, enables display by
3 one of the first and second display means, and disables display by an other of the first and
4 second display means.

1 13. A display in a mobile station comprising:
2 a first liquid crystal display having a plurality of first signal electrodes defining a
3 plurality of first pixels and a plurality of first scan electrodes;
4 a second liquid crystal display having a plurality of second signal electrodes defining a
5 plurality of second pixels and a plurality of second scan electrodes; and,
6 an operator for operating the first and second liquid crystal displays having a plurality
7 of scan electrode lines connected to the first and second scan electrodes, and a plurality of

1 signal electrode lines connected to the first signal electrodes and the second signal electrodes,
2 respectively.

1 14. A display as claimed in 13, further comprising a controller for providing a
2 control signal to the operator for controlling display by the first and second liquid crystal
3 displays.

1 15. A display as claimed in 13, further comprising a common light plate for
2 illuminating the first and second liquid crystal displays.

1 16. A display as claimed in 15, wherein the first and second liquid crystal displays
2 are located on opposite sides of the common light plate.

1 17. A display as claimed in 16, wherein the operator is located on a same side of
2 the common light plane as one of the first and second liquid crystal displays.

1 18. A display as claimed in 13, further comprising flexible wire connecting the
2 plurality of signal electrode lines and the plurality of scan electrode lines.

1 19. A display as claimed in 13, wherein the plurality of signal electrode lines
2 include;
3 a plurality of first signal electrode lines connecting the operator to a plurality of first
4 signal electrodes in the first liquid crystal display, and

1 a plurality of second signal electrode lines connecting the plurality of first signal
2 electrodes and the plurality of second signal electrodes in the second liquid crystal display.

1 20. A display in a mobile station comprising:
2 a first liquid crystal display having a plurality of first signal electrodes defining a
3 plurality of first pixels and a plurality of first scan electrodes;
4 a second liquid crystal display having a plurality of second signal electrodes defining a
5 plurality of second pixels and a plurality of second scan electrodes; and,
6 an operator for operating the first and second liquid crystal displays having a plurality
7 of signal electrode lines connected to the first and second signal electrodes, and a plurality of
8 scan electrode lines connected to the first scan electrodes and the second scan electrodes,
9 respectively.

1 21. A display as claimed in 20, further comprising a controller for providing a
2 control signal to the operator for controlling display by the first and second liquid crystal
3 displays.

1 22. A display as claimed in 20, further comprising a common light plate for
2 illuminating the first and second liquid crystal displays.

1 23. A display as claimed in 22, wherein the first and second liquid crystal displays
2 are located on opposite sides of the common light plate.

1 24. A display as claimed in 23, wherein the operator is located on a same side of
2 the common light plane as one of the first and second liquid crystal displays.

1 25. A display as claimed in 20, further comprising flexible wire connecting the
2 plurality of signal electrode lines and the plurality of scan electrode lines.

1 26. A display as claimed in 20, wherein the plurality of scan electrode lines
2 include;
3 a plurality of first scan electrode lines connecting the operator to a plurality of first
4 scan electrodes in the first liquid crystal display, and
5 a plurality of second scan electrode lines connecting the plurality of first scan
6 electrodes and the plurality of second scan electrodes in the second liquid crystal display.

ABSTRACT

Mobile station and display therein, in which a plurality of LCDs are made operative from one operation means for recognizing information on an originating station and information on a state of a receiver station even if a folder cover is not opened in a folder type mobile station, the mobile station including a folder cover movable between an opened position and a closed position, first display means mounted on one side of the folder cover having 'n' first signal electrodes and 'k' scan electrodes, second display means mounted on the other side of the folder cover having 'n' second signal electrodes and 'm-k' scan electrodes, and an operator for operating the first and second display means having 'm' scan electrode lines connecting the 'k' scan electrodes in the first display means and the 'm-k' scan electrodes in the second display means, and 'n' signal electrode lines connecting the first signal electrodes and the second signal electrodes, respectively.

FIG.1

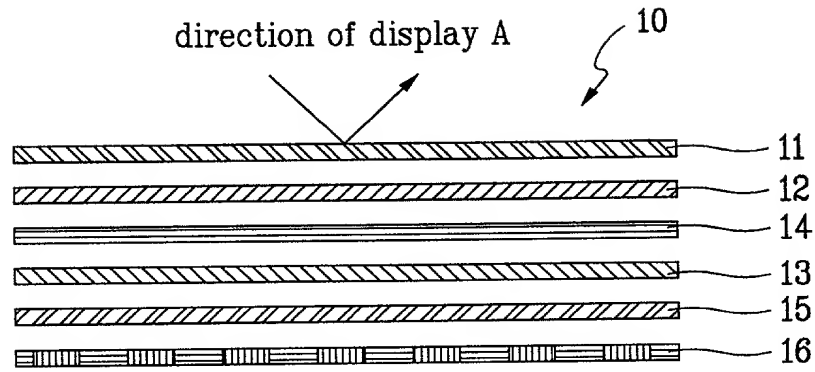


FIG.2


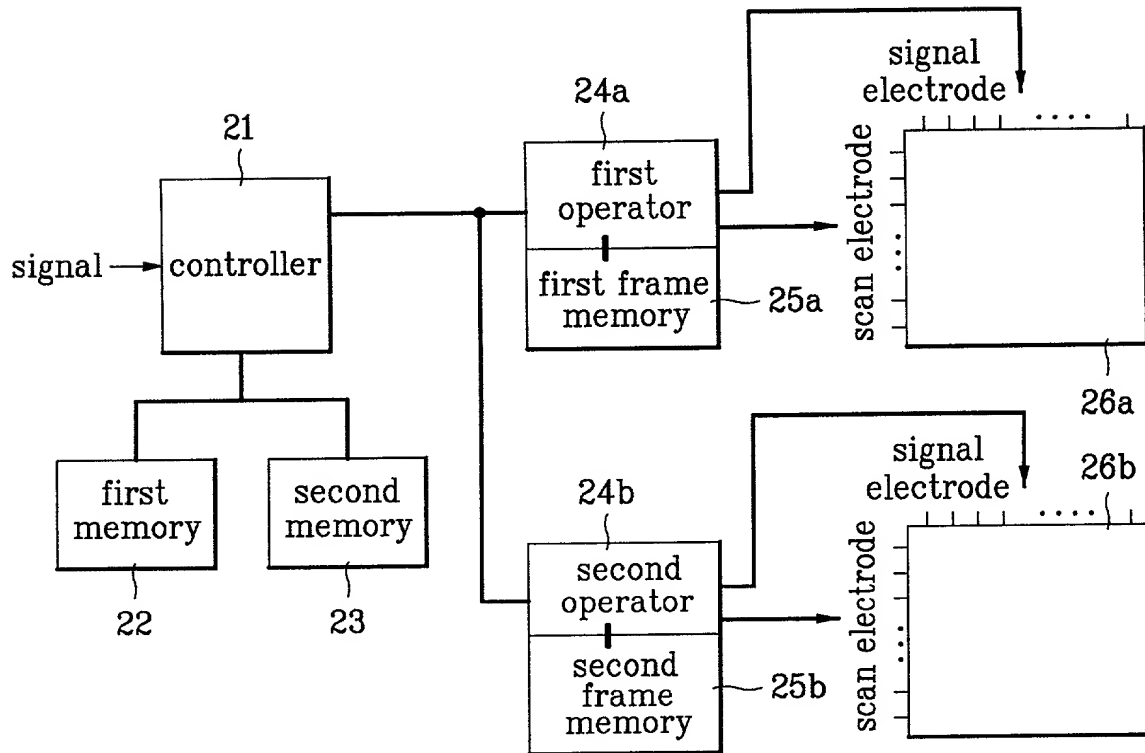


FIG. 3

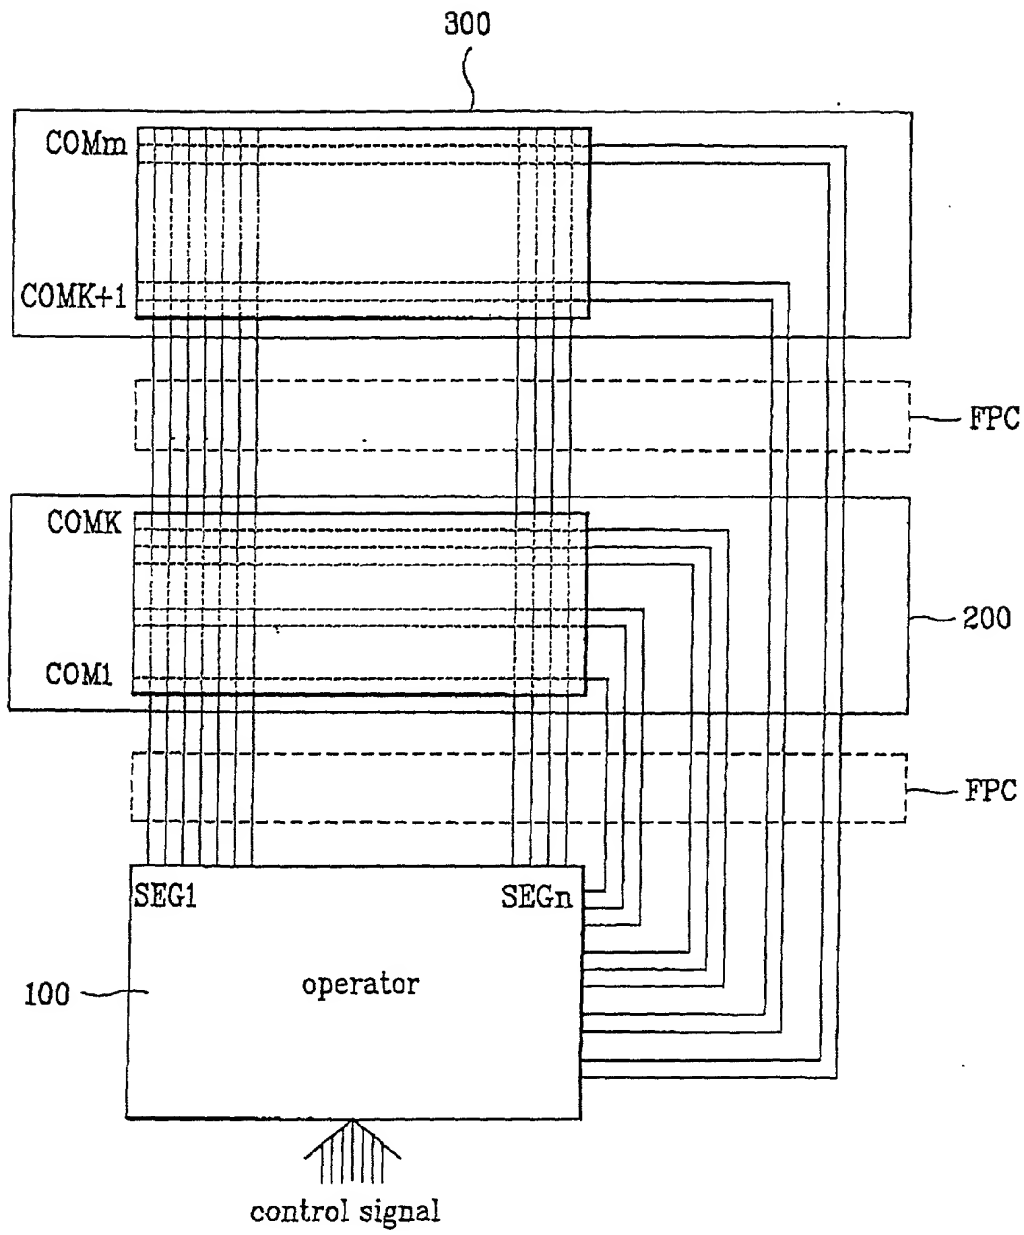



[illegible][illegible]

FIG. 6

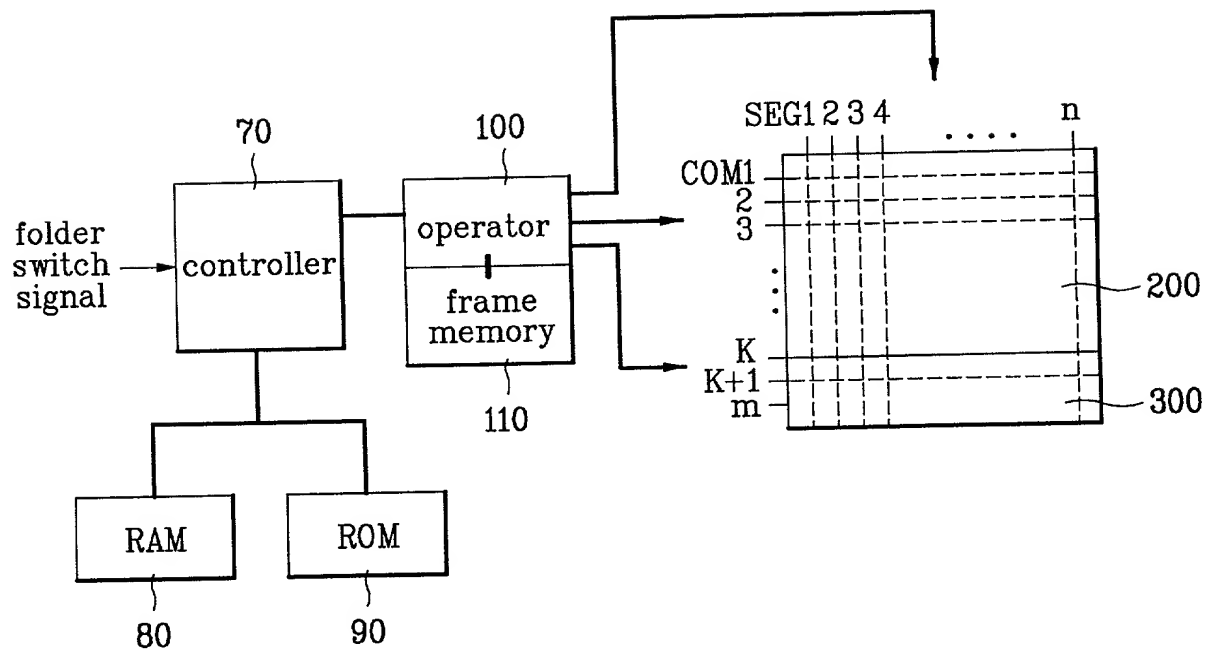


FIG. 7

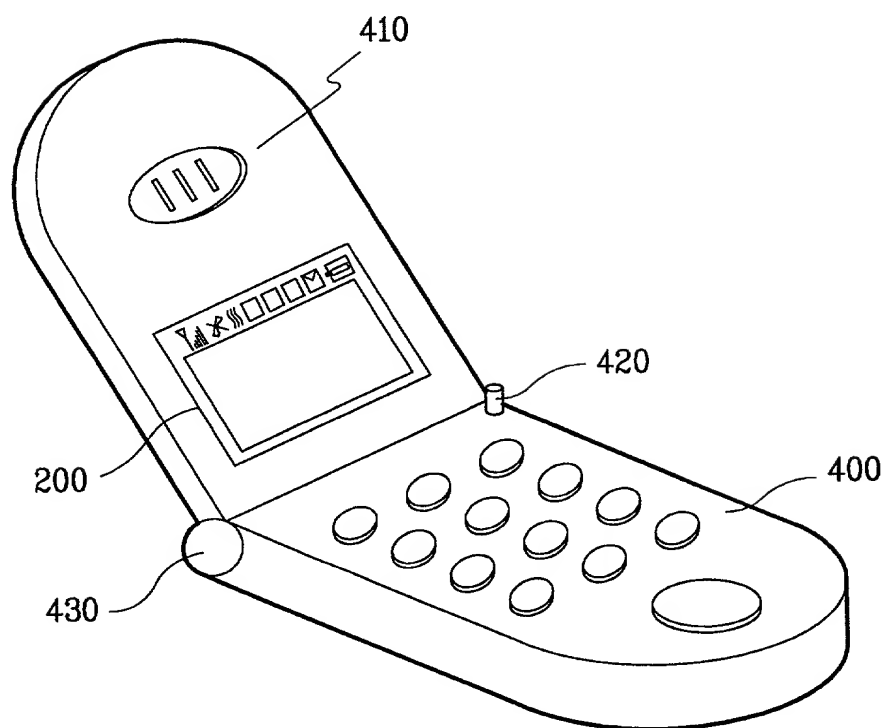


FIG. 8


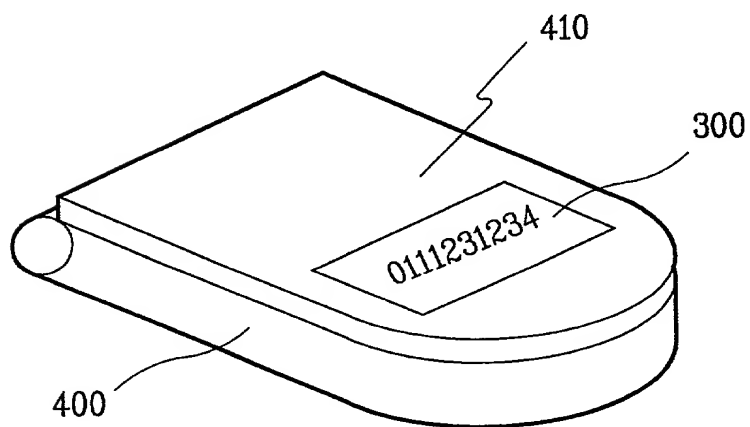


FIG. 9

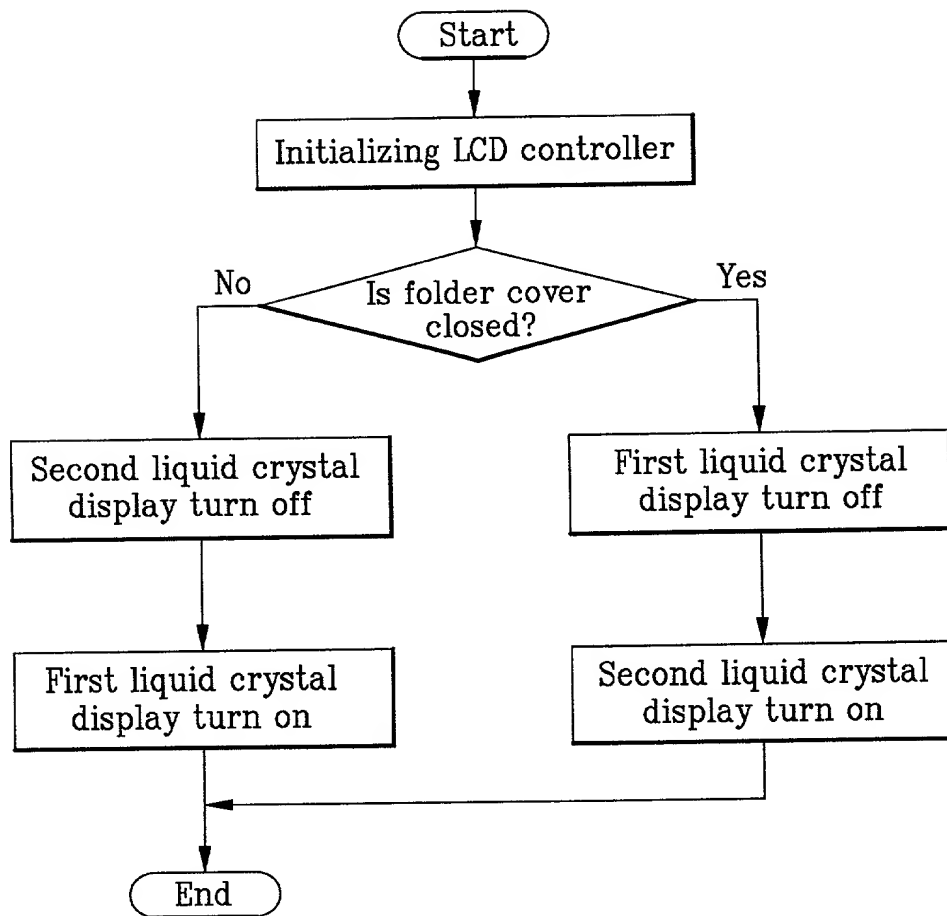

Docket No.: 8737.20016

Declaration, Power of Attorney and Petition

We (I) the undersigned inventor(s), hereby declare(s) that:

My residence, post office address and citizenship are as stated below next to my name.

We (I) believe that we are (I am) the original, first, and joint (sole) inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled

MOBILE COMMUNICATION STATION AND DISPLAY THEREIN

The specification of which

☒ is attached hereto.

☐ was filed on _____

as Application Serial No. _____

and amended on _____

☐ was filed as PCT international application

Number _____

on _____

and was amended under PCT Article 19

on _____

(if applicable).

We (I) hereby state that we (I) have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We (I) acknowledge the duty to disclose information known to be material to the patentability of this application as defined in Section 1.56 of Title 37 Code of Federal Regulations.

We (I) hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed. Prior Foreign Application(s)

Application No.	Country	Day/Month/Year	Priority Claimed	
1999-32001	KOREA	4 August 1999	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No

We (1) hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

We (I) hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

Application Serial No.	Filing Date	Status (pending, patented, abandoned)
1	1950	patented
2	1950	patented
3	1950	patented
4	1950	patented
5	1950	patented
6	1950	patented
7	1950	patented
8	1950	patented
9	1950	patented
10	1950	patented
11	1950	patented
12	1950	patented
13	1950	patented
14	1950	patented
15	1950	patented
16	1950	patented
17	1950	patented
18	1950	patented
19	1950	patented
20	1950	patented
21	1950	patented
22	1950	patented
23	1950	patented
24	1950	patented
25	1950	patented
26	1950	patented
27	1950	patented
28	1950	patented
29	1950	patented
30	1950	patented
31	1950	patented
32	1950	patented
33	1950	patented
34	1950	patented
35	1950	patented
36	1950	patented
37	1950	patented
38	1950	patented
39	1950	patented
40	1950	patented
41	1950	patented
42	1950	patented
43	1950	patented
44	1950	patented
45	1950	patented
46	1950	patented
47	1950	patented
48	1950	patented
49	1950	patented
50	1950	patented
51	1950	patented
52	1950	patented
53	1950	patented
54	1950	patented
55	1950	patented
56	1950	patented
57	1950	patented
58	1950	patented
59	1950	patented
60	1950	patented
61	1950	patented
62	1950	patented
63	1950	patented
64	1950	patented
65	1950	patented
66	1950	patented
67	1950	patented
68	1950	patented
69	1950	patented
70	1950	patented
71	1950	patented
72	1950	patented
73	1950	patented
74	1950	patented
75	1950	patented
76	1950	patented
77	1950	patented
78	1950	patented
79	1950	patented
80	1950	patented
81	1950	patented
82	1950	patented
83	1950	patented
84	1950	patented
85	1950	patented
86	1950	patented
87	1950	patented
88	1950	patented
89	1950	patented
90	1950	patented
91	1950	patented
92	1950	patented
93	1950	patented
94	1950	patented
95	1950	patented
96	1950	patented
97	1950	patented
98	1950	patented
99	1950	patented
100	1950	patented

And we (I) hereby appoint Song K. Jung, Reg. No. 35,210; Kenneth D. Springer, Reg. No. 39,843; and Rebecca A. Goldman, Reg. No. 41,786 and as our (my) attorneys, with full powers of substitution and revocation, to prosecute this application and to transact all business in the Patent Office connected herewith; and we (I) hereby request that all correspondence regarding this application be sent to Song K. Jung of Long Aldridge & Norman LLP, Attorneys At Law, 6th Floor, 701 Pennsylvania Avenue, N.W., Washington, D.C. 20004.

We (I) declare that all statements made herein of our (my) own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Hong Joo KIM

NAME OF FIRST SOLE INVENTOR

Signature of Inventor

Jul. 28. 2000

Date _____

Residence: Daekyu Apt, S-717, 41,

Yoido-dong, Yongdungpo-gu;

Seoul, KOREA

Citizen of: **KOREA**

Post Office Address: Same As Above